


# - Single Board Computer -

AMD Socket A Full size SBC

## IAC-F695

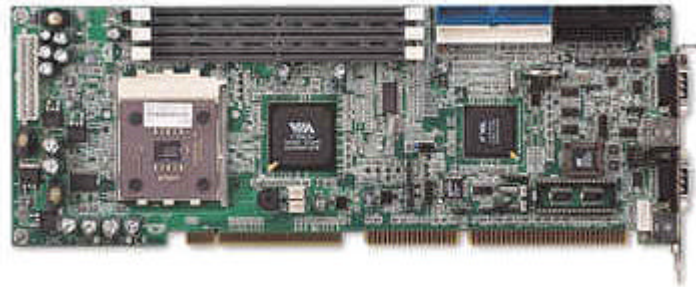

### FEATURES

- Support AMD Duron/Athlon Socket A Processor, 200/266 MHz FSB
- VIA VT8363A/686B chipset
- Three DIMM sockets, support up to 1.5GB SDRAM
- Two PCI IDE port that support up to four IDE devices and Ultra DMA-33/66/100
- One FDD port, support up to two floppy devices
- Two COM port

### SPECIFICATION

<b>CPU</b>	Support AMD Socket A Processor
<b>Chipset</b>	VIA VT8363A/686B chipset
<b>BIOS</b>	Phoenix <sup>®</sup> licensed BIOS
<b>System Memory</b>	Three 168-pin DIMM sockets, support up to 1.5GB SDRAM
<b>Flash Memory Disk</b>	Reserved socket for DiskOnChip from M-System, support up to 288MB flash memory disk
<b>IDE Interface</b>	2 PCI IDE port that support up to 4 IDE devices and Ultra DMA-33/66/100
<b>Floppy Drive Interface</b>	1 FDD port, support up to 2 floppy devices
<b>Serial Port</b>	2 COM port, 1 x RS-232 and 1 x RS-232/422/485
<b>Parallel Port</b>	1 multi-mode parallel port (SPPEPP/ECP)
<b>Universal Serial Bus</b>	Support 2 USB ports
<b>IR Interface</b>	Support 1 IrDA header
<b>Digital I/O</b>	4-bit digital I/O header
<b>Keyboard Connector</b>	5-pin header
<b>Keyboard / Mouse Connector</b>	On board 6-pin Mini-Din PS/2 mouse & keyboard
<b>RTC</b>	Internal RTC with Li battery
<b>Power Connector</b>	1 ATX feature connector (for Wake-On-LAN)

<b>Watchdog Timer</b>	16-level time-out intervals
<b>Health Monitoring</b>	On-board hardware monitoring function
<b>Operating Temperature</b>	0°CXC ~ 60°CXC
<b>Humidity</b>	5% ~ 95% RH, non-condensing
<b>Dimensions</b>	338.5 x 122 mm (13 1/4" x 4 5/6")

**Notes:**