


# - Server Barebone -

## 1U 19" Rackmount ATX Server Barebone

### SB-162A

---

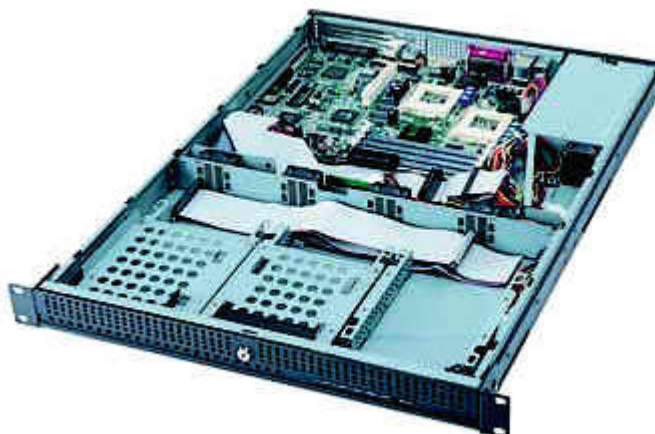

#### ● FEATURES

- 1U Slim ATX Server
- Included 1U chassis, Dual CPU ATX mainboard and 200W power supply
  - Support Dual Intel Pentium III processors with 133MHz FSB
    - Four DIMM sockets, support up to 2GB SDRAM
      - Three 10/100 Base-TX Ethernet ports
    - Dual Channel SCSI controller, support Ultra 160 SCSI HDDs
  - One Slim CD-ROM & FDD drives, and three internal 3.5" HDD drives
    - With 3 LAN LCD to indicate the status of LAN

#### ● SPECIFICATION

Construction	Heavy duty steel, 19" rackmount 1U chassis
Disk Drive bays	Support one slim 3.5" removable drive and one slim 5.25" CD-ROM removable drive, three 3.5" fix drives
Cooling Fan	Four 4cm DC Fans (10.5 CFM ea.)
Controls	Power ON/OFF, RESET switch
Status Indicators	Power ON/OFF, HDD and LAN status
Internal Speaker	One Buzzer
Dimension (H x W x D)	44 x 483 x 618mm (1.75" x 19" x 24.3")
Weight	
ATX Mainboard - <a href="#">MB-X62A</a>	<ul style="list-style-type: none"> <li>• Support dual Intel Pentium III / One Celeron CPU in socket 370, running up to 933MHz and support 133MHz FSB               <ul style="list-style-type: none"> <li>• VIA 694X/686A chipset</li> </ul> </li> <li>• Four DIMM sockets, support up to 2GB SDRAM               <ul style="list-style-type: none"> <li>• ATI Rage XL AGP VGA Controller</li> <li>• Dual Channel Ultra 3 SCSI</li> </ul> </li> </ul>

- Three 10/100 Base-TX interface, on-board RJ-45 connector, support Wake-On-LAN functions
  - One PCI expansion slot

Power Supply

EVP-2006 200W ATX power supply

**Environmental Specification**

Operating Temperature	0°C to 50°C
Relative Humidity	5% to 95%RH, non-condensing
Altitude	10,000ft (3,000m)
Vibration	1.5G Max and 0.1" p-p at 5 to 500Hz
Shock	10G peak acceleration (10m/sec)
Safety	Meets UL, CSA, and TUV
EMI	FCC Class A and CE

Ordering Information	
Model	Backplane Option
SB-162A	With VGA/3 x LAN/Dual Ultra 3 SCSI
SB-162B	With VGA/3 x LAN
Optional	
24" Slide Rail	
Internal SCSI Ultra-160 cable	